



CXP-15S-J1900IR

Features

- 15" Intel Baytrail Fanless Stainless Panel PC
- Intel Quad-Core Celeron-J1900 CPU
- IP66 full sealed with Anti-corrosion enclosure
- 15" LCD with full flat Resistive touch
- i-Cooling thermal control system
- Special thermal design with anti-condensation
- IP67 M12 metal connectors
- IP67 power adapter and IP67 external I/O cables
- CE, FCC, VCCI Class B passed
- Optional Mini-PCIe WLAN with external antenna
- Optional Sunlight readable with optical bonding



Technical Specifications

LCD

15" LED 1024 x 768

Brightness (cd/m2)

400

Contrast Ratio

600:1

CPU

Intel Quad-Core J1900 2.0 GHz

Memory

Two 204-pin 1333 MHz dual-channel DDR3L
SO-DIMM supports up to 8GB

OS Support

Windows

Touch Panel

5 wire, Full Flat Resistive Touch

I/O

2 x USB M12 , 1 x COM M12 (RS232/422/485)
1 x COM M12 (RS232), 1 x LAN M12

Dimension (WxHxD)(mm)

395 x 309.5 x 58

Power

DC 12V

Operating Temperature

0°~40°C

Storage Temperature

-20°~60°C





COMX

17F-10 NO. 79, SEC 1 XINTAI 5th RD.,
XIZHI DIST, 221, NEW TAIPEI CITY
22101 TAIWAN

Tel: +886 2 8698 3608
Fax: +886 2 8698 3606



Technical Drawing

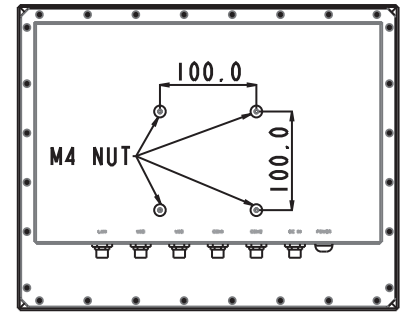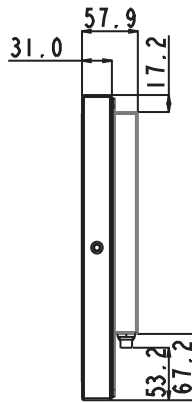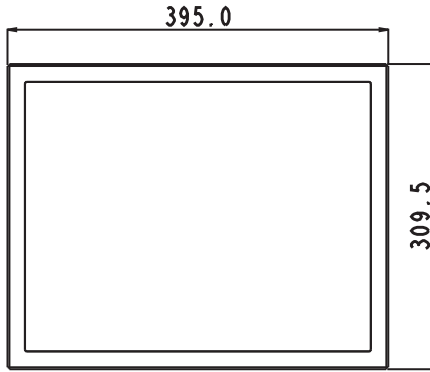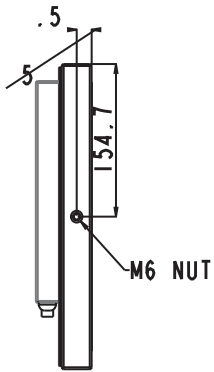


Packing & Options

Packaging System, power adaptor, AC power cord, DVD (drivers & manual)

- Options**
- Wireless or Wireless + BT kit (2 ant)
 - M12 to 1x COM cable
 - M12 to 1x USB cable (1 USB Port)
 - M12 to 2x USB cable (2 USB Ports)
 - M12 to 1x LAN cable
 - M12 to 1x COM cable (cable length is 2 meters, Waterproof)
 - SSD
 - Wall mount / table mount bracket

I/O & Control keys

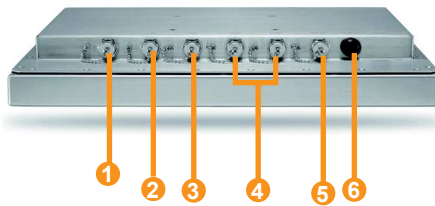

- 1 Giga Lan
- 2 USB (1/2)
- 3 USB (3/4)
- 4 COM x 2
- 5 DC-in
- 6 Power on/off

Customization

- 1000 nits high brightness LCD
- Sunlight readable optical bonding
- Anti UV and 7H coating
- Full flat PCT touch screen IP69K
- LCD Auto dimming
- LCD Super dimming (Low brightness)
- E3845 QC 1.91 GHz 10W



Table Mount



Wall Mount