



# CXP-19S-N2930IPF

## Features

- Low Power Consumption Panel PC
- Intel Celeron Processor N2930
- Onboard DDR3L 4GB 1333/1600MHz
- IP66/69K rated with M12 connector
- SUS304 Grade Stainless Steel Enclosure (SUS 316 Optional)
- Full Flat Bezel and Fanless Design
- Projective Capacitive Touch
- 9~36V DC Wide-ranging Power Input



## Technical Specifications

### LCD

19" LED 1280 x 1024

### Brightness (cd/m2)

350

### Contrast Ratio

1000:1

### CPU

Intel Celeron N2930

### Memory

Onboard 1333/1600 MHz dual-channel DDR3L supports up to 4GB

### OS Support

Windows

### Touch Panel

Projected Capacitive Touch

### I/O

1 x USB 3.0 M12 , 1 x COM M12 (RS232/422/485)  
1 x COM M12 (RS232), 1 x LAN M12

### Dimension (WxHxD)(mm)

470 x 388.6 x 60.8

### Power

DC 12V

### Operating Temperature

0°~50°C

### Storage Temperature

-30°~70°C


### COMX

17F-10 NO. 79, SEC 1 XINTAI 5th RD.,  
XIZHI DIST, 221, NEW TAIPEI CITY  
22101 TAIWAN

Tel: +886 2 8698 3608  
Fax: +886 2 8698 3606



# Technical Drawing

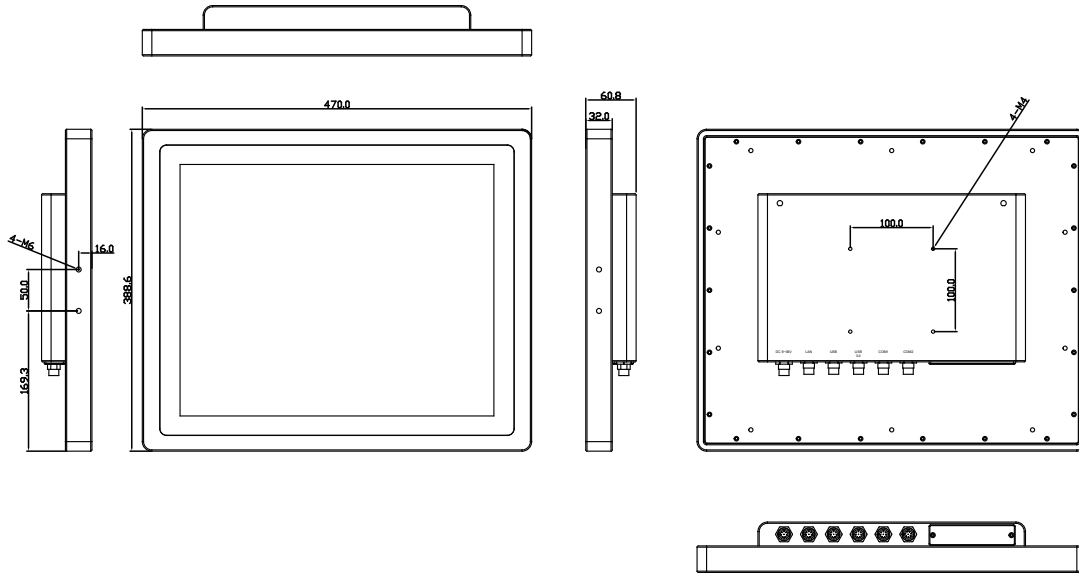


## Packing & Options

### Packaging

- System
- Power adaptor
- AC power cord
- M12 to 1x LAN cable
- M12 to 1x USB cable
- M12 to 1x USB cable
- M12 to 1x COM cable
- M12 to 1x COM cable
- Drivers & manual

## I/O & Control keys

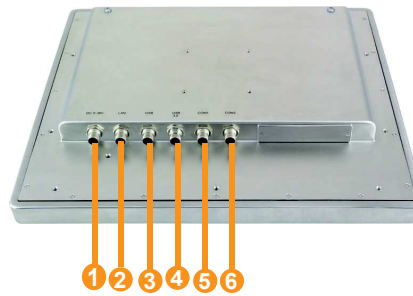

- 1 DC 12 V
- 2 LAN
- 3 USB
- 4 USB
- 5 COM
- 6 COM



Front



Back