



CXP-15M-E3845IPW

Features

- 15" Intel Baytrail Smart Fan OUTDOOR Panel PC
- Intel Quad Core E3845 Wide Temp. CPU
- IP66 full sealed SECC enclosure
- 15" 1000nits sunlight readable LCD
- Optical bonding with Anti-UV coating
- GG-type PCAP touch with AR glass coating
- Wide Temp. -20°~60°C operation capability
- IP67 M12 metal connectors
- CE, FCC, VCCI Class B passed



Technical Specifications

LCD

15" LED 1024 x 768

Brightness (cd/m2)

1000

Contrast Ratio

700:1

CPU

Intel Atom E3845 1.91 GHz

Memory

Two 204-pin 1333 MHz dual-channel DDR3
SO-DIMM supports up to 8GB

OS Support

Windows

Touch Panel

Pcap touch with AR glass coating

I/O

2 x USB M12, 2 x COM M12 (RS-232)
1 x LAN M12

Dimension (WxHxD)(mm)

415 x 329.5 x 85

Power

DC 7~32V

Operating Temperature

-20°~60°C

Storage Temperature

-20°~65°C

COMX

17F-10 NO. 79, SEC 1 XINTAI 5th RD.,
XIZHI DIST, 221, NEW TAIPEI CITY
22101 TAIWAN

Tel: +886 2 8698 3608
Fax: +886 2 8698 3606

Technical drawing of the 1000x1000x150 mm cabinet, showing front, top, and side views with dimensions and assembly details.

Front View: The cabinet has a total width of 1000 mm and a total height of 1500 mm. The front panel features a central square cutout with a side length of 800 mm. The cutout is framed by a 20 mm thick border. The front panel is secured by four M4 nuts, with a dimension of 1000 mm indicated for the distance between the nuts.

Top View: The top view shows the cabinet's footprint, which is 1000 mm wide and 1500 mm deep. The front panel is 150 mm thick. The top panel is 20 mm thick. The distance between the front and top panels is 100 mm. The distance between the top and back panels is 100 mm. The distance between the back and bottom panels is 100 mm. The distance between the bottom and front panels is 100 mm.


Side View: The side view shows the cabinet's profile, which is 1000 mm wide and 1500 mm high. The front panel is 150 mm thick. The top panel is 20 mm thick. The distance between the front and top panels is 100 mm. The distance between the top and back panels is 100 mm. The distance between the back and bottom panels is 100 mm. The distance between the bottom and front panels is 100 mm.

Assembly Details: The drawing includes detailed views of the front panel assembly. The front panel is secured by four M4 nuts. The distance between the nuts is 1000 mm. The front panel is 150 mm thick. The top panel is 20 mm thick. The distance between the front and top panels is 100 mm. The distance between the top and back panels is 100 mm. The distance between the back and bottom panels is 100 mm. The distance between the bottom and front panels is 100 mm.

I/O & Control keys

System, power adaptor, AC power cord,
DVD (drivers & manual)

- Wireless or Wireless + BT kit (2 ant)
- Waterproof COM cable, cable length is 2 meters
- Waterproof USB cable, cable length is 2 meters
- Waterproof LAN cable, cable length is 2 meters

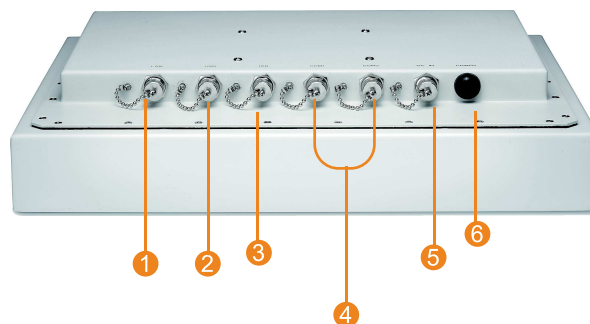

- ① Giga LAN
- ② USB 1/2
- ③ USB 3/4
- ④ COM x 2
- ⑤ DC-in
- ⑥ Power on/off