




CXM-24M

Features

- 24" Medical display
- Support Multi Display Mode: PIP/PAP
- AR protective filter
- Various video input: D-Sub,VGA, DP, HDMI, SDI Composite (PAL,NTSC), Component (RGBs/YPbPr) and S-Video (PAL/NTSC).
- cTUVus (ANSI/AAMI ES 60601-1, CAN/CSA C22.2 No.606011) CB(60950/60601), CE, FCC Class B part 15 CCC, VCCI, BSMI

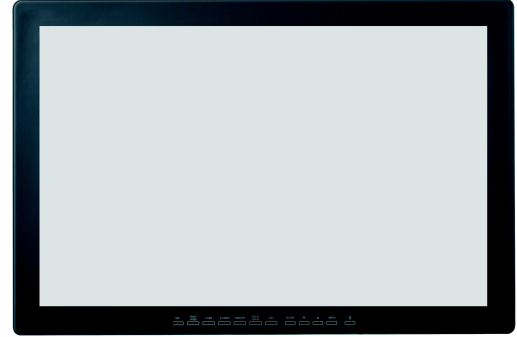

Technical Specifications

LCD

24" IPS with LED

Brightness (cd/m2)

350

Contrast Ratio

1000:1

Resolution

1920 x 1200

Active Screen Area

518.4 x 324

Viewing Angle

178°(H) x 178°(V)

Touch Panel

N/A

I/O

1 x DVI, 1 x VGA, 1 x HDMI, 1 x DP, 1 x RS232

Front Frame

Metal

Dimension (WxHxD)(mm)

584.4 x 390 x 98.2

Power

DC 24V

Operating Temperature

10°~40°C

COMX

17F-10 NO. 79, SEC 1 XINTAI 5th RD.,
XIZHI DIST, 221, NEW TAIPEI CITY
22101 TAIWAN

Tel: +886 2 8698 3608
Fax: +886 2 8698 3606

<http://www.comxpc.com>